

Nexen Assembly # 939201

LUBRICATOR, AIR\*01.5 OZ., .250NPT

Air Ports (2X): .250 NPT

Air Flow: 45 SCFM

Metal Bowl with no Sight Gauge

Pressure Rating: 0 to 10.2 BAR [0 to 150 PSIG]

Temperature Rating: 4.4 C to 52 C [40 F to 125 F]

Bowl Capacity: 44ml [1.5 oz]


Suggested Lubricant: F442 Oil

Petroleum-based oil of 100 to 200 SUS viscosity at 100°F and an aniline point greater than 200°F

(DO NOT USE OILS WITH ADDITIVES, COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, DETERGENTS, OR SYNTHETIC OILS.)

Weight: 0.4 kg [1.0 lb]

Materials: Body: Zinc, Bowl: Zinc, Seals: Nitrile

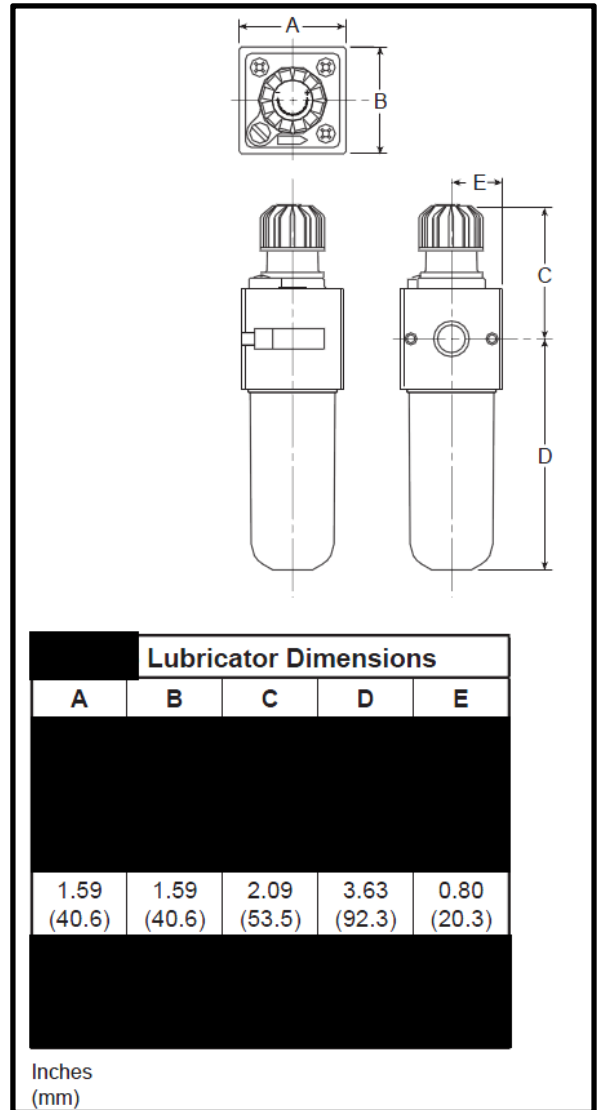

**Air Flow Details:**

