


GEAR COUPLING ADAPTERS

4H SERIES MULTIPLE DISC CLUTCHES, 5H SERIES TOOTH CLUTCHES AND TORQUE LIMITERS

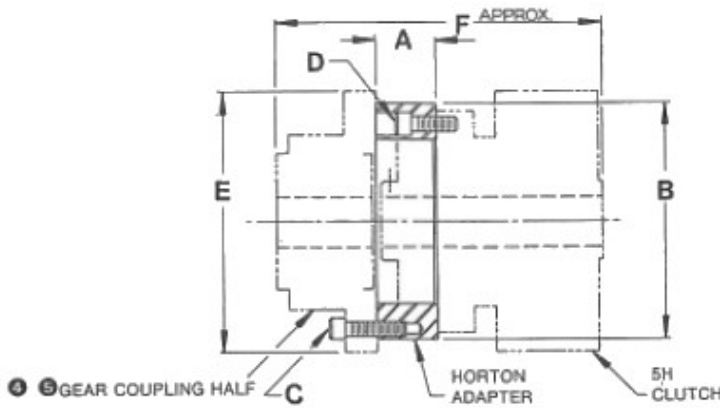

For Model	Gear Coupling Size	① Coupling Max Bore		Max. Misalignment Angular	Product No.
		Inches	Millimeters		
5H30P	1	1 ⁵ / ₈	41.28	3/4°	909931
5H35P	1 ②	1 ⁵ / ₈	41.28	3/4°	910031
5H40P	1	1 ⁵ / ₈	41.28	3/4°	910131
5H45P	1 1/2	2 ³ / ₁₆	55.55	3/4°	910231
5H50P	1 1/2	2 ³ / ₁₆	55.55	3/4°	910331
5H60P	1 1/2 ③	2 ³ / ₁₆	55.55	3/4°	910431
5H70P	2	2 ³ / ₄	69.85	3/4°	910531
5H80P	2 1/2	3 ¹ / ₄	82.55	3/4°	911731

③

For Model	Gear Cplg. Size	Dim.	A	B	C		D SCREW SIZE	E	F
					SCREW SIZE	B.C.			
5H30P	1	Customary, in. Metric, mm	1 ¹ / ₁₆ 26.97	4 ¹ / ₈ 104.77	(6) 1/4-20 x 1	3.750 95.25	(4) 1/4-20 x 3/4	4 ⁹ / ₁₆ 115.87	5 ¹ / ₁₆ 147.64
5H35P	1	Customary, in. Metric, mm	1 ¹ / ₄ 31.75	4 ³ / ₄ 120.65	(6) 1/4-20 x 1	3.750 95.25	(4) 1/4-20 x 3/4	4 ⁹ / ₁₆ 115.87	6 ¹ / ₈ 155.58
5H40P	1	Customary, in. Metric, mm	1 ¹ / ₄ 31.75	4 ³ / ₄ 120.65	(6) 1/4-20 x 1	3.750 95.25	(4) 1/4-20 x 3/4	4 ⁹ / ₁₆ 115.87	6 ³ / ₁₆ 157.16
5H45P	1 1/2	Customary, in. Metric, mm	1 ¹ / ₄ 31.75	5 ¹ / ₂ 139.70	(4) 3/8-16 x 1 1/4	4.812 122.22	(4) 1/4-20 x 3/4	6.0 152.40	6 ⁵ / ₈ 168.28
5H50P	1 1/2	Customary, in. Metric, mm	1 ⁹ / ₁₆ 39.68	6.0 152.40	(4) 3/8-16 x 1 1/4	4.812 122.22	(4) 5/16-18 x 3/4	6.0 152.40	7.0 177.80
5H60P	1 1/2	Customary, in. Metric, mm	1 ³ / ₈ 34.92	6 ³ / ₄ 171.45	(4) 3/8-16 x 1 1/4	4.812 122.22	(4) 5/16-18 x 3/4	6.0 152.40	7 ³ / ₈ 187.33
5H70P	2	Customary, in. Metric, mm	2 ¹ / ₃₂ 51.59	8.0 203.20	(6) 1/2-13 x 1 1/2	5.875 149.22	(4) 1/2-13 x 1	7.0 177.80	8 ² / ₃₂ 219.86
5H80P	2 1/2	Customary, in. Metric, mm	3 ¹ / ₈ 79.38	9 ¹ / ₂ 241.30	(6) 5/8-11 x 1 1/2	7.125 180.97	(6) 1/2-13 x 7/8	8 ³ / ₈ 212.73	12.0 304.80

① Coupling manufacturers: Dodge, Koppers and Philadelphia.

② Coupling manufacturers: Dodge, Koppers, Philadelphia, Falk and Zurn.